

SEKISUI CHEMICAL CO.,LTD.

HIGH PERFORMANCE PLASTICS COMPANY
FUNCTIONAL TAPE DIVISION
THE OKURA PRESTIGE TOWER 2-10-4 TORANOMON,
MINATO-KU TOKYO 105-8566 JAPAN
TEL. (+81) 3-6748-6447 FAX. (+81) 3-6748-6446




Official WEB Site
<https://www.sekisuichemical-hppc.com/en/>



SEKISUI Worldwide
<https://www.sekisuichemical.com/company/>

- PRECAUTIONS
- 1) THE TAPES SHOWN IN THIS CATALOG (HEREINAFTER REFERRED TO AS "TAPES") ARE USED ONLY AS TAPES.
 - 2) DO NOT USE "TAPES" AS AN ELECTRICAL INSULATING MATERIAL. THEY ARE NOT SUITABLE FOR SEALING A CARDBOARD BOX AND PACKING.
 - 3) DO NOT STICK "TAPES" ON THE SKIN (OR THE BODY), OTHERWISE LESIONS MAY APPEAR.
 - 4) AVOID USING "TAPES" ON SOLID NATURAL WOOD LIKE PLAIN WOOD, STONE LIKE MARBLE AND SOFT POLYVINYL CHLORIDE MATERIALS.
WHEN THE "TAPES" ARE STUCK TO SOME OTHER THINGS, DEPENDING ON THE MATERIALS (NATURAL MATERIALS ETC.) AND CONDITIONS (SOFT) OF THEIR SURFACES, THEY MAY LEAVE SOME ADHESIVE RESIDUE AND HURT ADHESIVE SURFACES OF THE THINGS.
 - 5) WHEN "TAPES" ARE LEFT ON SOMETHING AND EXPOSED TO DIRECT SUNLIGHT FOR A LONG TIME, THEY MAY LEAVE SOME OF THEIR ADHESIVE ON AN ADHEREND.
 - 6) USE "TAPES" AFTER WIPING OFF DUST, OIL, WATER AND OTHER FOREIGN MATTERS FROM THEIR ADHESIVE SURFACES.
 - 7) AVOID STORING "TAPES" IN PLACES EXPOSED TO HIGH TEMPERATURES AND DIRECT SUNLIGHT.

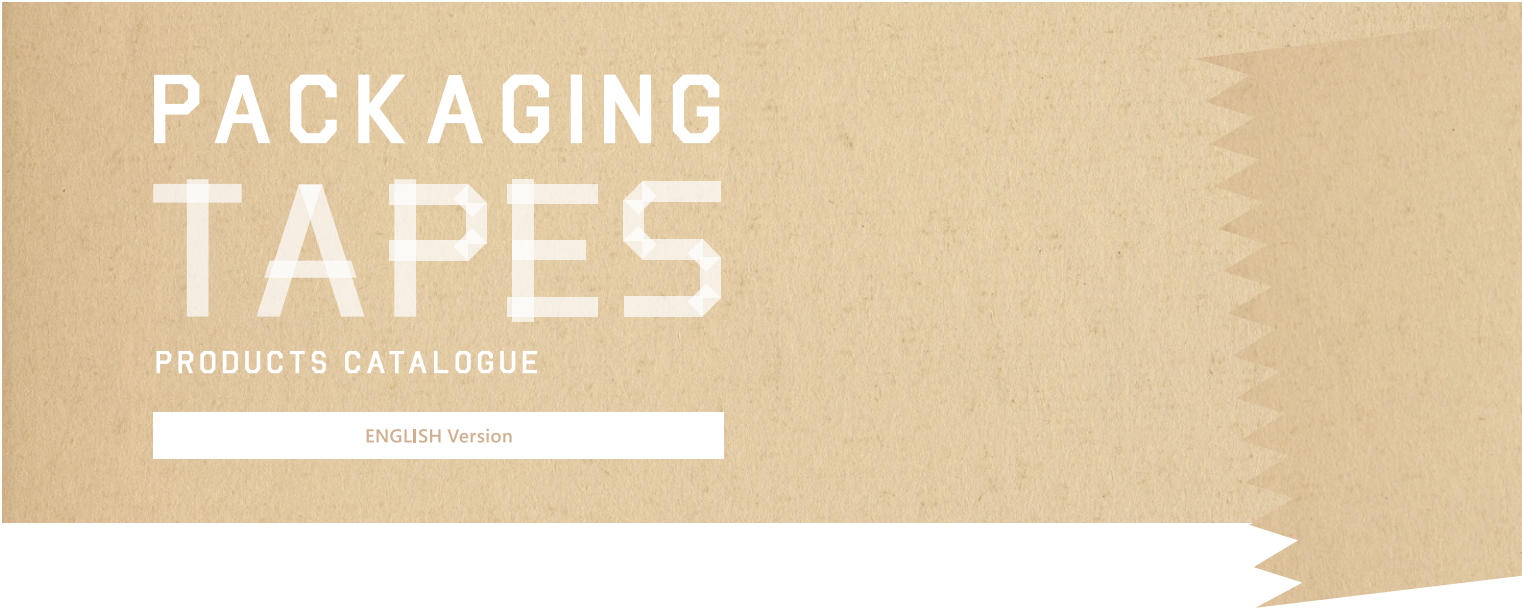

Contributing SDGs through our business

The Sekisui Chemical Group is committed to solving issues through our outstanding technologies and great quality to realize our group vision of "improving the lives of people around the world and the global environment" and to contributing to SDGs, which aim for a sustainable society.



All Sekisui's Kraft tapes feature an eco-friendly paper core

They can be crushed at the time of disposal, greatly reducing the volume of waste.



Previous paper cores Eco-friendly paper cores

《Comparison of 70 volumes discarded》

Let's crush it and throw it away.

Easy to crush paper leads that were previously discarded
Reduces trash volume to less than half of what it used to be.



Eco-friendly paper core (50M)




Eco-friendly paper core (Long roll)

*The thickness of the paper core is different between short and long rolls.

*As for Kraft tapes produced overseas, the use rate of recycled paper is more than 50 %

Sekisui's Kraft tape contributes CO₂ emissions reduction

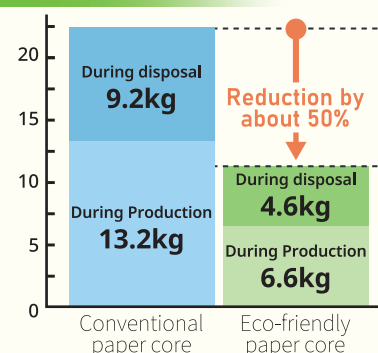

Comparison of CO₂ emissions of paper cores for 10 cases of Kraft tapes with a width of 50 mm and a length of 50 m

#1. In the calculation of CO₂ emissions, we assume that all paper cores are composed of "core base paper." CO₂ emissions were then calculated from the paper core weight of that material (core base paper), referring to the CO₂ emissions of "1.2 kg-CO₂" for "core base paper" in the "CO₂ emissions Intensity table" published by the Center for Environmental Information Science in 2007.

#2. The CO₂ emission coefficient (0.84) is quoted from the "Environmental Household Accountancy booklet" published by the Ministry of the Environment, and the figures here are converted as combustible waste.

Certifications



Eco Mark
Certification
No. 05114024

Eco mark

The standard for kraft tape is to meet the requirements that the recycled paper component ratio is 40% or more for the base material and 100% for the paper core. Also, any organic solvent is not used at the adhesive application process.

<Object product> Ecora Pack Kraft Tape No.501

Conforming products to the Law Conforming the Promotion of Procurement of Eco-Friendly Goods and Services by the State and Other Entities

Requirement for kraft tape is the recycled paper component ratio of 40% or more for the base material, and that for cloth tape is the recycled PET fiber component ratio of 40% or more for it.



Recycled paper
is used for
the paper core.

Green mark

Only products, of which raw material has a component ratio of used paper of 40% or more in principle and certified by Paper Recycling Promotion Center, are allowed to indicate it.



FSC® - Certified

FSC forest management certification confirms that the forest is being managed in a way that preserves biological diversity and benefits the lives of local people and workers, while ensuring it sustains economic viability. FSC-certified forests are managed to strict environmental, social and economic standards.



Green procurement network

It is a network with moderate ties for corporations, administration and consumers established in 1996 for the efforts to promote the green procurement. Sekisui Chemical also joins it to work on the development of environmentally-friendly products.

- Publication of applicable products in the GNP database for the green procurement.
- Publication of applicable products in the specific procurement goods information provision system of the Law Conforming the Promotion of Procurement of Eco-Friendly Goods and Services by the State and Other Entities.

<http://www.gpn.jp>

Japan's Food Sanitation Law-compliant products

Conform to the standards for synthetic resin instruments or containers and packaging.

<Object product> Vegetable bundling tape No.808



Biomass Mark

This mark is attached to products that use bio-derived resources.

These products are effective in reducing greenhouse gas emissions by using biomass-derived raw materials. SEKISUI Cellotape No. 252 is biomass mark 75, SEKISUI Cellotape Betta and Back Sealer C Type have received Biomass Mark 70 certification.

The products in the catalog comply with the ROHS Directive. (M) SDS can be downloaded from HP.
<https://www.tutuminet.com/>

Products purchased under the Green Procurement System


■ Ecora Pack Kraft Tape No. 501



■ Ecora Cloth Tape No. 701



■ Cloth Series New Clear Cloth Tape

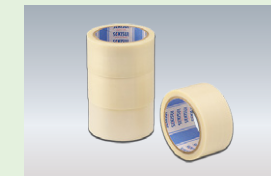


■ Ecora Cloth Tape No. 601S



Non-solvent type adhesive tape products



■ Kraft Tape No. 500

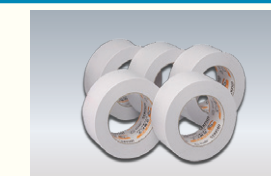

■ White Kraft Tape No. 500W



■ Super Kraft Tape No. 504NS



■ Evercel OPP Tape



■ SEKISUI OPP Tape



■ Kraft Tape No. 500F



■ White Super Kraft Tape No. 504NS

All of Sekisui's paper cores are made of 100% used paper.

Method of Choosing Tape

Please refer to the points below when choosing a suitable tape for your adhesive needs.


1 Do you want a permanent adhesive, a one time adhesive, or a removable one?

- Choose an adhesive to meet your needs.



2 How much and what kind of strength must the tape have, and how long must it hold?

- Match it with your elasticity needs.

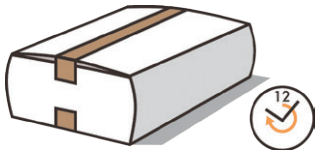

3 Investigate the production environment (application by hand/machine, production area, production time, production employees)!

- Choose tape that will make your packaging go smoothly.



4 What are the environmental conditions (inside/outside, temperature, humidity, solvent, medicine, etc.)?

- Choose tape that makes opening packages easy upon arrival at their destination.




5 What are your shipping conditions (shipping method, storage conditions, package opening method, etc.)?

- Choose a product to meet your environmental needs.



6 What other functions do you need (protection, masking, indication, etc.)?


- Match each use and aim

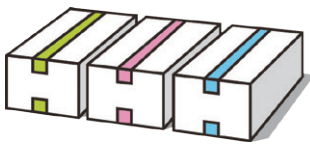

Evaluation Method for Adhesive Tape Characteristics


Tape performance is expressed as numerical values that represent the results of tests conducted under given conditions to reveal the characteristics of individual tapes. These indications are a useful reference to determine what kind of tape can be used in different situations.

Tape structure and size

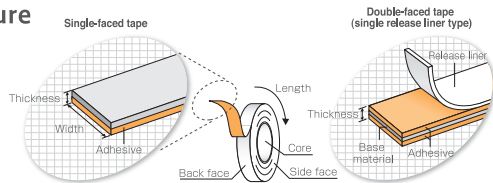

Holding performance


Holding performance is the resistance to a static load exerted to the tape stuck to the adherend in a lengthwise direction. Generally, a test strip (tape) is attached to one end of a test panel (stainless steel plate) and a downward load of 1 kg is applied to the test strip. The holding performance is expressed as the dislocation of the tape measured after the elapse of a given time or the time spent until the tape is completely removed from the adherend.



■ Measuring methods are in compliance with JIS Z0237.
■ In this brochure, values are expressed in international units (SI: International System of Units). Traditional units are provided in parentheses.


Adhesion

Adhesion is the strength needed to peel off a test strip (tape) that is adhered to a stainless steel plate in a 180° (or 90°) direction. This provides a reference for the difficulty in peeling off a tape. It is a typical characteristic used in determining tape performance.



Elongation

The elongation measurement reveals the tape's ability to conform to a curved or uneven surface. It is measured by pulling the tape in a lengthwise direction. This measurement is expressed in a percentage. For example, if a tape has an elongation of 150 %, it means that 1 meter of tape extends to 2.5 meters.



Guide Marks

The following functions are shown in order to make choosing a suitable tape easier. Please use them as a reference when choosing your tape and considering your packaged products weight, shape, packaging production environment, delivery environment, etc.

Light packaging	Suitable for sealing single packs (or container openings), and other general packaging. Good for sealing cans, bundling food products, etc.	
Light and Medium packaging	Suitable for packaging lighter and medium-weight packages, such as small tools.	
Medium and heavy packaging	Mainly suitable for the delivery of medium and heavy weight packaging in severe conditions.	
Heavy packaging	Suitable for relatively heavy products, contents whose rebound is strong, and in cases where strong adhesive strength is needed.	
Cut by hand	 Can tear it cleanly by hand, without the use of an exclusive cutter.	Writable For writing letters and marks using an oil marker.
Longer tape available	 For machine sealing.	Overwrapping No slippage even when tapes are layered
Color tape available	 For improving the images of products or classifying products.	Water resistant Suitable for protection from lots of water drops in the delivery environment.
Printable	 For printing the company name, product name and identification.	Low temperature No performance deterioration in a low-temperature environment.
No noise	 Silent unwinding sound for a comfortable working condition.	Solvent-free Used solvent-free adhesive.
Non-slip	 Non-slippery tape for stacking packages.	

Cautions for Use

- Packaging tape is for sealing cardboard boxes, home delivery, light wrapping, and other packaging uses. It is not to be used for anything else.
- Do not adhere it to the body.
- Do not use it for electrical insulation.
- Adhere it after wiping the adhesive surface well, so it is free of dust and oil.
- Press down hard when adhering it.
- It is best to store the rolls on their sides in low temperature and low humidity places.
- Be sure to check each product's "Cautions for Use" before use.

Contents

Method of Choosing Tape	P3
Evaluation Method for Adhesive Tape Characteristics ...	P3
Kraft Tape	
Kraft Tape No.500	P5
White Kraft Tape No.500W	P5
Color Kraft Tape No.500WC	P6
Super Kraft Tape No.504NS	P6
White Super Kraft Tape No.504WNS	P6
Kraft Tape No.500F / 500FP	P7
Ecora pack Kraft Tape No.501	P8
Kraft NIFUDA Tape	P8

Product lineup	
Kraft Tape	P9
Long Tape lineup	P12
OPP Tape	P13
Cloth Tape [All PET Cloth]	P17
Cloth Tape	P19
Light packaging Tape	P21

Kraft Tape

The most the widely used tape for carton sealing application.
Easily hand tearable and easy to open. Contribute to reduce CO2 emission.

Sekisui's kraft tape uses "Eco-friendly paper core."



SEKISUI' s Kraft tape core, made from recycled paper, made half the weight and thickness of a traditional core,making it easy to crush after use.

NO.500 Kraft Tape No.500

Medium and light packaging



Excellent holding power and stable quality.
Light unwinding force enables excellent workability.

The most frequently used, general purpose tape for packaging cardboard boxes.

● Sealing a Cardboard Case (Medium/Lightweight)

Thickness (mm)	0.14	Base material	Kraft
Adhesion (N/10mm)	3.30	Adhesive	Hotmelt
Cut by hand	Longer tape available	Printable	Color tape available
No noise	Solvent-free	Eco-friendly core	Green mark

*Color tape in sizes other than 38×50, 50×50, 38×500 and 50×500 will be custom-made.
*Black, light blue, Brown, Pink, Purple and Light green are available as semi-standard colors.

NO.500W White Kraft Tape No.500W

Medium and light packaging



White-color kraft tape

While maintaining the same qualities as those of conventional kraft tape, this white tale will not spoil stylishly designed packages. This tape is ideal, for instance, for food packages with clean images or cosmetics' packages with sophisticates feeling.

● Highly imaginative packaging for cosmetics
● Decoration

Thickness (mm)	0.14	Base material	Kraft
Adhesion (N/10mm)	3.30	Adhesive	Hotmelt
Cut by hand	Longer tape available	Printable	No noise
Solvent-free	Eco-friendly core	Green mark	

NO.500WC Color Kraft Tape No.500WC

Medium and light packaging



Choice of 11 color for the improvement of product images and the identification of contents.

This is a Kraft tape made of white special kraft paper that has 11 vivid colors. This is a new type of tape that responds to the needs of the age when product identification and product image are important.

● For identification of contents
● For products that value image

Thickness (mm)	0.14	Base material	Kraft
Adhesion (N/10mm)	3.30	Adhesive	Hotmelt
Cut by hand	Color tape available	No noise	Solvent-free
Eco-friendly core	Green mark		

*Color tape in sizes other than 38×50, 50×50, 38×500 and 50×500 will be custom-made.

NO.504NS Super Kraft Tape No.504NS

Medium and light packaging



High quality, functional, non-slip tape which prevents packages from becoming unbalanced.

Three functions are added to the original use of kraft tape, such as slip-resistant, layer-able, and letter-writing. You can perform all kinds of work more comfortably and efficiently.



NO.504WNS White Super Kraft Tape No.504WNS

Medium and light packaging



Non-slippery super white kraft tape.

White type kraft tape that retains the functions of 504NS. The performance of load crumbling prevention, layering, and writing has been further improved, and the application has been expanded.



504NS/504WNS product information

● Stacked storage ● Returnable boxes ● Light foods, sweets and household goods ● Luggage that needs to be identified and checked

Cut by hand	Longer tape available	Non-slip	Printable	Thickness (mm)	0.14
Writable	Overwrapping	Solvent-free	Eco-friendly core	Adhesion (N/10mm)	3.30
Green mark				Base material	Kraft
				Adhesive	Hotmelt

You can download the latest catalog from the 2D code



Kraft Tape No.500F / 500FP [FSC® Certified Product]

Medium and light packaging

NO.500F



This is the first FSC® certified kraft tape in Japan.

Kraft tape is based on Kraft paper made from FSC® certified materials, recycled resources, and other controlled materials. By choosing FSC® certified products, you can help protect forests.

- Unprinted Kraft Tape
- Biomass film is used in the package.



We manufacture FSC® certified products.

NO.500FP



FSC® certified kraft tape with FSC label printed on it shows environmental consideration.

This tape uses environmentally friendly paper as the base material and is printed with the FSC® mark using biomass ink. This packaging tape uses kraft paper made from FSC-certified materials, recycled resources, and other controlled materials as the base material and is printed with the FSC-certified mark using biomass ink. It conveys environmentally friendly packaging.

- Using biomass ink for printing

● Printing standard product.....



▲ FSC label and "This tape will save the environment.FSC® certified product" printed. *
*Japanese

Custom printing is available!

- QR codes can be printed for website and video promotion.
- Logos and messages can be printed to enhance the image of the package



500F/500FP product information

- Sealing of Cardboard Case (Medium/Lightweight)
- Companies working on environmental issues

Color



Cardboard

Thickness (mm)	0.14	Base material	Kraft
Adhesion (N/10mm)	3.30	Adhesive	Hotmelt
Cut by hand	Printable	No noise	Solvent-free
Eco-friendly core	FSC certified	Biomass	Green mark

FSC®-certified kraft paper is used as the base material.

FSC forest management certification confirms that the forest is being managed in a way that preserves biological diversity and benefits the lives of local people and workers, while ensuring it sustains economic viability. FSC-certified forests are managed to strict environmental, social and economic standards.



NO.501

Ecora pack Kraft Tape No.501 | Medium and light packaging



Kraft tape using 40% or more recycled paper.

At least 40% recycled paper is used to ensure the same performance, appearance, and quality as conventional kraft tape. This is an ecology tape that meets the needs of the times with a high level of quality that does not allow the presence of recycled paper.

- Companies working on environmental issues
- For over-the-counter sale as an ecological product

Thickness (mm)	0.14	Base material	Kraft
Adhesion (N/10mm)	3.30	Adhesive	Hotmelt
Cut by hand	No noise	Solvent-free	Eco-friendly core
Green mark	Eco mark		

● Color



Cardboard

NIFUDA

Custom Printed Tape | Medium and light packaging



This kraft tape combines the two uses of display sticker and packaging tape.

Easy to use tape for packaging and display work at the same time. In addition to the 2 types of regular products that can alert you, custom printing is also possible.

- Sealing for caution package
- Custom Printed tape

Thickness (mm)	0.14	Base material	Kraft
Adhesion (N/10mm)	3.30	Adhesive	Hotmelt
Cut by hand	No noise	Solvent-free	Eco-friendly core
Green mark			

● Color



Red Base
White Text

● Standard-design




You can download the latest catalog from the 2D code





Kraft Tape

Product lineup

		Kraft Tape No.500	White Kraft Tape No.500C	Color Kraft Tape No.500WC
				
P E R F O R M A N C E	Color	 Cardboard Yellow • Green • Blue Red • White	 White	 White • Black • Yellow • Green Blue • Red • Purple • Sky Light-green • Orange • Pink
	Base material	Kraft paper	Kraft paper	Kraft paper
	Adhesive	Hotmelt	Hotmelt	Hotmelt
	Width (mm)	25 • 38 • 50 • 60 • 75	25 • 38 • 50 • 60 • 75	38 • 50
	Longer tape (M)	500 • 750 • 1000	500	-
	Printable	✓	✓	-
P R O P E R T Y	Thickness (mm)	0.14	0.14	0.14
	Adhesion (N/10mm)	3.30	3.30	3.30
	Holding performance(mm)	0	0	0
	Tensile strength (N/10mm)	60.0	60.0	60.0
Packaging weight		Medium and light packaging	Medium and light packaging	Medium and light packaging
F E A T U R E S	Cut by hand	Cut by hand		
	Non-slip			
	Writable			
	Overwrapping			
	No noise	No noise		
	Bunding			
	Identification	Identification		Identification
C E R T I F I C A T I O N S	Eco mark			
	Biomass mark			Biomass mark
	Green mark	Green mark		
	FSC® certified			FSC® certified
	Eco-friendly core	Eco-friendly core		
	Solvent-free	Solvent-free		
Remarks				

*The figures in the table above are measurements and are not guaranteed values. 【No.500】olor tape in sizes other than 38×50, 50×50, 38×500 and 50×500 will be custom-made. / Black, light blue, Brown, Pink, Purple and Light green are available as semi-standard colors.

Super Kraft Tape No.504 NS	White Super Kraft Tape No.504WNS	Ecora pack Kraft Tape No.501	Custom Printed Tape Kraft NIFUDA Tape	Kraft Tape No.500F・FP
				
 Cardboard	 White	 Cardboard	 Red (White Text)	 Cardboard
Kraft paper	Kraft paper	Kraft paper	Kraft paper	Kraft paper
Hotmelt	Hotmelt	Hotmelt	Hotmelt	Hotmelt
25 • 38 • 50 • 60 • 75	38 • 50	50	50	50
500	500	-	-	-
✓	✓	-	-	✓
0.14	0.14	0.14	0.14	0.14
3.30	3.30	3.30	3.30	3.30
0	0	0	0	0
60.0	63.3	60.0	60.0	60.0
Medium and light packaging	Medium and light packaging	Medium and light packaging	Medium and light packaging	Medium and light packaging
Cut by hand				
Non-slip				
Writable				
Overwrapping				
		No noise		
				Identification
		Eco mark		Biomass mark
Green mark				
				FSC® certified
Eco-friendly core				
Solvent-free				
				*1 500F : Biomass film package *2 500FP : Biomass ink

【No.500F・No.500FP】 Properties are the same whether printed or not, printed standard, or custom printed.

You can download the latest catalog from the 2D code



Kraft Tape Specification

Kraft Tape No.500				
Width (mm)	Length (M)	Packaging	Packing	Color
25	50	10	100	Cardboard
38	50	6	60	Cardboard・Yellow・Green Blue・Red・White
50	50	5	50	Cardboard・Yellow・Green Blue・Red・White
60	50	4	40	Cardboard
75	50	3	30	Cardboard
38	500	-	6	Cardboard・Yellow・Green Blue・Red・White
50	500	-	5	Cardboard・Yellow・Green Blue・Red・White
60	500	-	4	Cardboard
38	1000	-	4	Cardboard
50	1000	-	3	Cardboard
White Kraft Tape No.500W				
Width (mm)	Length (M)	Packaging	Packing	Color
25	50	10	100	White
38	50	6	60	White
50	50	5	50	White
60	50	4	40	White
75	50	3	30	White
38	500	-	6	White
50	500	-	5	White
Color Kraft Tape No.500WC				
Width (mm)	Length (M)	Packaging	Packing	Color
38	50	1	60	Red・Blue・Yellow・Green White・Black・Orange・Yellow-green・Sky・Pink・Purple
50	50	1	50	Red・Blue・Yellow・Green White・Black・Orange・Yellow-green・Sky・Pink・Purple

Super Kraft Tape No.504NS				
Width (mm)	Length (M)	Packaging	Packing	Color
25	50	1	100	Cardboard
38	50	1	60	Cardboard
50	50	1	50	Cardboard
60	50	1	40	Cardboard
75	50	1	30	Cardboard
38	500	-	6	Cardboard
50	500	-	5	Cardboard
60	500	-	4	Cardboard
White Super Kraft Tape No.504WNS				
Width (mm)	Length (M)	Packaging	Packing	Color
38	50	1	60	White
50	50	1	50	White
38	500	-	6	White
50	500	-	5	White
Ecora pack Kraft Tape No.501				
Width (mm)	Length (M)	Packaging	Packing	Color
50	50	1	50	Cardboard
Kraft Tape No.500F				
Width (mm)	Length (M)	Packaging	Packing	Color
50	50	1	50	Cardboard
Kraft NIFUDA Tape				
Width (mm)	Length (M)	Packaging	Packing	Color
50	50	1	50	Red (White Text)

Kraft Tape (500M~1500M)・OPP Tape(500M~1500M) Long Tape lineup

● Kraft Tape

Kraft Tape No.500				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.140	38	500	6	Cardboard
	50	500	5	Cardboard
	60	500	4	Cardboard
	75	500	3	Cardboard
	35	750	6	Cardboard
	38	750	5	Cardboard
	45	750	4	Cardboard
	50	750	4	Cardboard
	38	1,000	4	Cardboard
	50	1,000	3	Cardboard
White Kraft Tape No.500W				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.140	38	500	6	White
	50	500	5	White
Super Kraft Tape No.504NS				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.140	38	500	6	Cardboard
	50	500	5	Cardboard
	60	500	4	Cardboard
White Super Kraft Tape No.504WNS				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.140	38	500	6	White
	50	500	5	White

*Kraft Tape No.500 50mm×500M :
Black, light blue, Brown, Pink, Purple and Light green are available as semi-standard colors.

● OPP Tape

Orien Tape No.830				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.090	38	500	8	Transparent・Brown
	50	500	6	Transparent・Brown
	60	500	4	Transparent・Brown
Tough Light Tape No.835				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.062	38	1,000	6	Transparent・Brown
	50	1,000	4	Transparent・Brown
	60	1,000	5	Transparent・Brown


Evercel OPP Tape No.820NEV				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.052	38	1,000	6	Transparent・Brown
	50	1,000	5	Transparent・Brown
	60	1,000	4	Transparent・Brown
Evercel OPP Tape No.830NEV				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.090	50	500	5	Transparent・Brown
	38	1,000	6	Transparent
	50	1,000	5	Transparent
	60	1,000	4	Transparent
	75	1,000	3	Transparent
Evercel OPP Tape No.835NEV				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.062	38	1,000	6	Transparent・Brown
	50	1,000	5	Transparent・Brown
	60	1,000	4	Transparent・Brown
	75	1,000	3	Transparent・Brown
Evercel OPP Tape No.820 Color				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.060	48	1,500	6	Yellow・Green Blue・Red・white
Sekisui OPP Tape E No.886				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.090	48	1,000	4	Transparent・Brown
Sekisui OPP Tape E No.884				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.062	48	1,000	5	Transparent・Brown
Sekisui OPP Tape E No.882				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.052	36	1,500	6	Transparent・Brown
	48	1,500	5	Transparent・Brown
Sekisui OPP Tape No.884V				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.063	48	1,000	5	Transparent・Brown
Sekisui OPP Tape No.882V				
Thickness (mm)	Width (mm)	Length (M)	Packaging	Base Color
0.050	36	1,500	6	Transparent・Brown
	48	1,500	5	Transparent・Brown




You can download the latest catalog from the 2D code

OPP Tape

Product lineup

		Evercel OPP Tape			Evercel OPP Tape No.820 Color
		No.820 NEV	No.835 NEV	No.830 NEV	
					
P E R F O R M A N C E	Color				
		Transparent • Brown			White • Yellow • Green Blue • Red
	Base material	Polypropylene			Polypropylene
	Adhesive	Acrylic			Acrylic
	Width (mm)	25 • 38 • 50 • 60 • 75			36 • 48
	Longer tape (M)	1000	1000	500 • 1000	1000
	Printable	-	-	-	-
P R O P E R T Y	Thickness (mm)	0.052	0.062	0.090	0.052
	Adhesion (N/10mm)	3.24	3.40	3.50	2.90
	Holding performance (mm)	0.2	0.2	0.2	-
	Tensile strength (N/10mm)	47.2	52.0	74.0	44.2
Packaging weight		Light and Medium packaging	Medium and heavy packaging	Medium and heavy packaging	Light and Medium packaging
F E A T U R E S	Cut by hand				
	Writable	Writable			
	Overwrapping	Overwrapping			
	Water resistant	Water resistant			
	Bundling				
	Identification				Identification
C E R T I F I C A T I O N S	Eco mark				
	Biomass mark				
	Green mark	Green mark			
	Act on Promoting Green Procurement				
	FSC®certified				
	Eco-friendly core				
	Solvent-free	Solvent-free			
Remarks					

*The figures in table above are measurements and are not guaranteed values. * 【830】 38X50 is Transparent only.

Sekisui OPP Tape E			Sekisui OPP Tape		
No.882E	No.884E	No.886E	No.880V	No.882V	No.884V
					
					
Transparent • Brown			Transparent • Brown		
Polypropylene			Polypropylene		
Acrylic			Acrylic		
36 • 48	48	48	36 • 48		
1500	1000	1000	1500	1500	1500
-	-	-	-	-	-
0.052	0.062	0.090	0.045	0.050	0.065
2.70	2.80	2.90	2.30	2.50	2.50
0.2	0.2	0.2	0.3	0.3	0.3
52.0	52.4	76.0	36.0	39.0	47.0
Light and Medium packaging	Medium and heavy packaging	Medium and heavy packaging	Light and Medium packaging	Light and Medium packaging	Medium and heavy packaging
Writable					
Overwrapping					
Water resistant					
Green mark					
Solvent-free					

You can download the latest catalog from the 2D code



Product lineup

*The figures in table above are measurements and are not guaranteed values. 【No.830】 Please feel free to consult us about printing tape and color matters. / 0×100 is the standard size of color tape. / 38×50 is only transparent standard product. 【No.835】 Please feel free to consult us about printing tape and color matters. / 50×100 is the standard size of color tape. / 38×1000 is only transparent standard product.




		
Transparent • Brown Yellow • Green • Blue • Red White • Black	Transparent • Brown	Transparent • Brown Yellow • Green • Blue • Red White • Black
Polypropylene	Special polyethylene	Polypropylene
Rubber	Rubber	Rubber
25 • 38 • 50 • 60 • 75	38 • 50 • 75	25 • 38 • 50 • 60 • 75
500	-	1000
✓	✓	✓
0.090	0.096	0.062
2.40	2.40	2.36
0.2	0.2	0.2
73.0	17.0	58.0

	Cut by hand	
Writable		
Overwrapping		
Water resistant		
Bundling		
Identification		Identification

Green mark		

- Manuscripts to be printed
- Basically, create the manuscript as a “camera ready copy”.
- Sketch orders (designated paper for printing) cost an additional charge for the camera ready copy.
- * In some cases we are unable to accept orders due to the design.

- Be aware that the blank space between the end of the (transverse) effective size of the design and the tape edge, the pitch as a summation of the (longitudinal) design size and the space to the next design will differ from product to product.

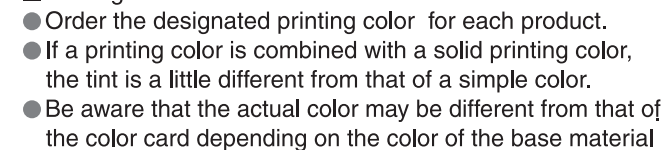

Type A Letterpress printing (letter printing)
Type B Intaglio printing (white letters on a colored background)
Type C Letterpress printing (solid printing + letter printing)
Type D Intaglio printing (solid printing + white letters on a colored background)

- You will be charged for the actual expenditure for the creation of a printing plate, except in the case of cellophane tape.
- If there is no repeated order during the storage period of the printing plate (12 months), the printing plate will be disposed of. Plates for printing cellophane tape will be disposed of after six months. If a repeated order is accepted after the plate has been disposed of, it is treated as a new order.

- Delivery quantity shall be the number produced.
- The delivery quantity will have fluctuations of around 15 percent of the order quantity.
- Please confirm the order quantity separately.

	Effective size of design (transverse)	Blank space from the tape edge Upper: 7 mm or more Lower: 7 mm or more
	Endless design	Possible
	Printing color	Separate consultation
	Printing type	Type A, Type B, Type C and Type D

50mm / 56mm / 60mm / 70mm / 75mm / 80mm / 100mm /
120mm / 125mm / 140mm / 150mm / 200mm / 250mm / 280mm /
300mm / 500mm / 560mm / 600mm

Kraft Tape No. 500 / White Kraft Tape No. 500W /
Super Kraft Tape No. 504NS / White Super Kraft Tape No. 504WNS
(Only 38mm and 50 mm-wide)

● For other conditions, please contact us.

Tape length Tape width	50M	500M
25mm	2,700 rolls (27c/s)	2,700 rolls (27c/s)
38mm	1,740 rolls (29c/s)	1,740 rolls (29c/s)
50mm	1,350 rolls (27c/s)	1,350 rolls (27c/s)
60mm	1,120 rolls (28c/s)	1,120 rolls (28c/s)
75mm	900 rolls (30c/s)	900 rolls (30c/s)

Print type	A Type	B Type
Text	10.7 pt or more	14.3 pt or more
Draw a line or draw a circle	Thickness 0.5 mm or more	

Cloth Tape

Product lineup

		Brown-Cloth Tape No.750	New Cloth Tape No.760	Ecora Cloth Tape No.701	Clear Cloth Tape No.781	New Clear Cloth Tape No.784
						
P E R F O R M A N C E	Color					
		Brown	Brown • Yellow • Green Blue • Red • White	Brown • White	Translucent	Translucent
	Base material	PET Cloth	PET Cloth	Cloth containing recycled PET • PET Cloth	PET Cloth	Cloth containing recycled PET • PET Cloth
	Adhesive	Rubber	Rubber	Rubber	Rubber	Rubber
	Width (mm)	25 • 38 • 50 • 60 • 75	38 • 50 • 60 • 75 100 • 120 • 150	50	50	50
	Longer tape (M)	-	-	-	-	-
	Printable	-	✓	-	-	-
P R O P E R T Y	Thickness (mm)	0.15	0.14	0.12	0.15	0.11
	Adhesion (N/10mm)	8.00	8.40	7.50	1.70	2.30
	Holding performance (mm)	0	0	0	0.6	0.2
	Tensile strength (N/10mm)	69.0	72.8	32.0	58.4	34.0
Packaging weight		Heavy packaging	Heavy packaging	Light and Medium packaging	Light and Medium packaging	Light and Medium packaging
F E A T U R E S	Cut by hand	Cut by hand				Cut by hand
	Writable	Writable				Writable
	Overwrapping	Overwrapping				Overwrapping
	Water resistant	Water resistant				Water resistant
	Bundling	Bundling				Bundling
	Identification			Identification		
C E R T I F I C A T I O N S	Eco mark					
	Biomass mark			Biomass mark*		
	Green mark	Green mark				Green mark
	Act on Promoting Green Procurement			Green Procurement	Green Procurement	
	FSC®certified					
	Eco-friendly core					
	Solvent-free	Solvent-free				
Remarks				*Biomass film packaging		

*The figures in table above are measurements and are not guaranteed values.

You can download the latest catalog from the 2D code



Cloth Tape

Product lineup

Cloth Tape

Product lineup


		Cloth Tape No.600	Cloth Tape No.600V	Cloth Tape No.600V Colored	Cloth Tape No.600S	Ecora Cloth Tape No.601S	Cloth Tape No.600J	
								
P E R F O R M A N C E	Color	Cardboard Color • Yellow Green • Blue • Red • White Silver • Black	Cardboard Color	Yellow • Green • Blue • Red White • Silver • Black • Pink	Cardboard Color	Cardboard Color	Cardboard Color	Cardboard Color
	Base material	Staple fiber	Staple fiber • PET Cloth	Staple fiber • PET Cloth	Staple fiber	Staple fiber Cloth containing recycled PET	Staple fiber • PET Cloth	
	Adhesive	Rubber	Rubber	Rubber	Rubber	Rubber	Rubber	
	Width (mm)	25 • 38 • 50 • 60 • 75 100	25 • 38 • 50 • 60 • 75 100	38 • 50	50	50	50 • 75 • 100	
	Longer tape (M)	-	-	-	-	-	-	
	Printable	-	-	-	-	-	-	
P R O P E R T Y	Thickness (mm)	0.31	0.22	0.22	0.26	0.22	0.19	
	Adhesion (N/10mm)	3.70	3.40	3.40	4.40	5.00	3.68	
	Holding performance (mm)	0.0	0.5	0.5	0.2	0.2	0.3	
	Tensile strength (N/10mm)	58.8	49.6	49.6	50.0	41.5	33.2	
Packaging weight		Heavy packaging	Heavy packaging	Heavy packaging	Heavy packaging	Heavy packaging	Medium and heavy packaging	
F E A T U R E S	Cut by hand	Cut by hand			Cut by hand			
	Writable	Writable			Writable			
	Overwrapping	Overwrapping			Overwrapping			
	No noise							
	Bundling	Bundling			Bundling			
	Identification	Identification		Identification				
C E R T I F I C A T I O N S	Eco mark							
	Biomass mark							
	Green mark	Green mark			Green mark			
	Act on Promoting Green Procurement					Green Procurement		
	FSC®certified							
	Eco-friendly core							
	Solvent-free	Solvent-free			Solvent-free			
Remarks								

*The figures in table above are measurements and are not guaranteed values.



Light packaging Tape

Product lineup

		Sekisui Cellphane Tape No.252	MAIDO Tape	Colored Cellphane Tape
				
P E R F O R M A N C E	Color			
		Transparent	Red • White • Yellow	Yellow • Green • Blue • Red White • Black
	Base material	Cellophane	Cellophane	Cellophane
	Adhesive	Rubber	Rubber	Rubber
	Width (mm)	12 • 15 • 18 • 24	15	12 • 15 • 18 • 24
	Longer tape (M)	-	-	-
P R O P E R T Y	Printable	✓	-	-
	Thickness (mm)	0.049	0.050	0.050
	Adhesion (N/10mm)	3.70	3.80	3.80
	Holding performance (mm)	0.7	0.5	0.5
F E A T U R E S	Tensile strength (N/10mm)	36.0	34.0	34.0
	Packaging weight	Light packaging	Light packaging	Light packaging
	Cut by hand			
P U R P O S E	Writable	Writable		
	Overwrapping	Overwrapping		
	Temporary fixing			
C E R T I F I C A T I O N S	Bundling	Bundling		
	Identification			Identification
	Eco mark			
C E R T I F I C A T I O N S	Biomass mark	Biomass mark		
	Green mark	Green mark		
	Act on Promoting Green Procurement	Green Procurement		
	FSC®certified			
	Eco-friendly core			
	Solvent-free			
Remarks			Standardized tape products for sale confirmation	

*The figures in table above are measurements and are not guaranteed values. 【MAIDO Tape (Cellophane Tape for Printing)】 The physical properties of MAIDO Tape and Cellophane Tape for Printing are equivalent

Fixlon Tape No.816	Paper Masking Tape No.652	Bag Sealer Tape H Type	Bag Sealer Tape C Type	Vegetable bundling Tape No.808
				
				
White	White	Yellow • Green • Blue • Red White • Orange • Purple • Sky	Yellow • Green • Blue • Red White	Purple • Green
Special polyethylene	Paper	PET	Cellophane	Polypropylene
Rubber	Rubber	Rubber	Rubber	Rubber
12 • 19 • 25	12 • 15 • 18 • 20 • 24 • 30 36 • 40 • 50	9	9	15 • 25
-	-	-	-	-
-	-	✓	-	✓
0.083	0.10	0.058	0.050	0.061
3.92	1.10	3.00	3.50	3.00
-	-	0.2	-	-
189.0	33.4	72.0	34.0	45.0
Light packaging	Light packaging	Light packaging	Light packaging	Light packaging
	Cut by hand			
	Writable			
	Overwrapping			
Temporary fixing				
Bundling		Bundling		
		Identification		
			Biomass mark	
			Green mark	
		Water resistant		Japan's Food Sanitation Law-compliant products Water resistant

